2nd receipt :-

A. N. CHOWDHARY, M.Sc.,
GEOLOGIST
Cell : 98454 73398

SRI SHIRDI SAI CONSULTANTS

10, 3rd Floor, 19th Cross, 14th Main, Revenue Layout, Padamanabhanagar
Bangalore - 560 061.

GROUND WATER INVESTIGATION REPORT

To the Asst Executive Engineer -
BBMP
Dasarahalli Division -

S. No. : Date : 20.3.12

1. Name of the Customer
2. Location.
   a) Village near church side Shettihalli gate b) Block / Taluk. Dasarahalli c) District Bangalore
   Ward No: 12 pages
3. Lithology of the Area Granetic in nature
4. Tophographic Features of the Area The area was a plain land
5. Hydrogeological condition of the Area Good
6. Geophysical survey result. By Diving method
   a) Type of Method.
   b) No of Soundings Conducted.
   c) Recommended Sounding.
   d) Particulars of formations present in the subsurface/possible ground water zones encountered at
      Around 550' ?
      700 - 800'
      1050 - 1075'
      2
      2
   e) Condition of Ground Water. Good
7. Type of well Recommended. Borewell (6½")
8. Depth Recommended. 1000 - 1100'
   A/c No-12
9. Expected Yield. 1400 - 1600 GPH
10. Quality of Water. Good
11. Approximate depth at which the water is expected to be met. Around 500' ?
12. Recommended Type and Length of casing to be inserted. Around 130 - 140' of MS may be needed
13. Rain water Harvesting adviced or not - Strictly Adviced -
14. Remarks. Around 10 - 20' of 10" casing may be needed in some cases

PALLAVI BOREWELL & DRILLERS

Dealers in : 6½" 4½" Borewells Drilling & Inwell Drilling
All Kinds of Motors & Pumps, Sales & Service
No. 66/8, 1st Main Road, Maruthi Layout, M. G. Road,
Nelamangala Bangalore - 562 123.
Moble : 93412 24311, 90089 87530,

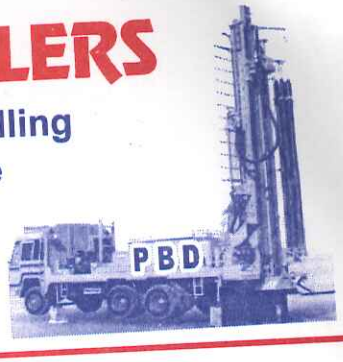

Ref :

Date : 8.4.12

YIELD REPORT

1. Name and Address of the Party	:	A.E.E. ward No. 12 Shettyhalli Sub Divison B.B.M.P.
2. Borewell Location	:	Shetty halli gate. Jalya.
3. Total Depth Drilled	:	984 Feet
4. Casing Pipe	:	137 Feet
5. Coupling	:	1 Collar
6. Yield Details	:	
a) First Spring Touched at	:	372 Feet
b) Second Spring Touched at	:	545 Feet
c) Third Spring Touched at	:	780 Feet
7. Total Yield in G.P.H.	:	1600 G.P.H
8. Remarks	:	Yield Good.

For PALLAVI BOREWELL & DRILLERS

M.B Niranjan

Proprietor